Rewinds and Prints Simultaneously

The GAR-03FX rewinds labels while the Gressler Thermal Inkjet (GT Series) prints on them at the same time for efficient production.

Versatile Printing Capabilities

Whether you're printing barcodes, numbers, or detailed tracking information, the Gressler Thermal Inkjet printer delivers clear and precise results for a wide variety of labeling needs.

Consistent Label Tension

The system ensures tightly wound labels without loosening, maintaining production quality and preventing issues during storage or usage.

Space and Time Efficiency

With both label rewinding and printing combined into one machine, you save valuable space and streamline your workflow, improving overall production efficiency.

User-Friendly Operation

Designed for ease of use, the package allows for quick setup and efficient operation, minimizing downtime and increasing productivity.

GRESSLER COMPACT REWINDER GAR-03FX & TIJ GT SERIES

4			
Package No.	GT Series	Max Print Height	
CMS TJR1 (1) 1060	GT-1000-1	12.7mm	
CMS TJR1 (2) 1060	GT-1000-2	25.4mm	
CMS TJR2i (1) 1060	GT-2000i-1	25.4mm	
CMS TJR2i (2) 1060	GT-2000i-2	50.8mm	
CMS TJR2i (3) 1060	GT-2000i-3	76.2mm	
CMS TJR2i (4) 1060	GT-2000i-4	101.6mm	
- 400	100000		



3 gressler

contact us

Tel/WA: 0878 4737 7537 Email: sales@gressler.co

Authorized Indonesia Distributor PT MULIA MESIN INDUSTRI

Jakarta (Head Office)

Citragrand Cibubur CBD Ruko Fraser Park FR 03, No.30, Jl.Alternatif Cibubur No.33, Jatirangga, Kec. Jatisampurna, Kota Bekasi, Jawa Barat 17434 Tel: 021 5020 0990

Bandung (GSC)

Jl Banyak Niaga Kulon no 12 A Kota Baru Parahyangan Cipeundeuy, Kec Padalarang Kab Bandung Barat, Jawa Barat 40553

Surabaya (Branch & GSC)

Ruko Kahuripan Avenue No.25 Jl. Kahuripan Raya, Kahuripan Nirwana. Sidoarjo 61252

Semarang (GSC)

BSB, JADE SQUARE No.A21A, Pesantren, Kec. Mijen, Kota Semarang, Jawa Tengah 50212

www.gressler.id





	M	anuf./
Mini Conveyor Specification GAC-02CX		าสินอายุ/
Weight	7.5 kg	Batch:
Dimensions	600 x 230 x 175 mm (with pads)	
Power Supply	220V / 50Hz	
Power Consumption	mption Max 20W	
Belt Width	150 mm (PVC, customizable length)	
Motor	High-quality AC motor with digital speed controller	
Speed	0-15 m/min	
Structure	High-quality aluminum	

02/2022 01/2026





CAMERA & VISION SENSORS GVS-1400-06

Code Counting and Verification

I Identifying and counting patterns, spots, and edges, as well as verifying the existence of specific patterns, spots, edges, circles, or lines.

Defect and Quality Detection

2 Detecting anomalies or exceptions in visual data and assessing the quality and clarity of printed or engraved marks such as lot numbers, serial numbers, and expiration dates.

Measurement and Calibration

3 Measuring various attributes like size, angles, diameters, brightness, contrast, width, and grayscale, and determining the position and alignment of objects for calibration purposes.


Recognition and Reading (OCR/OCV)

4 Identifying text through OCR, recognizing colors, codes, and other visual features, and ensuring that barcodes, QR codes, and other identification marks are present, correctly formatted, and readable.

Logic and Decision-Making

Applying conditional logic, judgments, and calculations to make decisions based on visual data, including checking the correct placement and orientation of labels and marks to meet specific standards and regulatory requirements.

MINI CONVEYOR GAC-02CX & TIJ GT SERIES

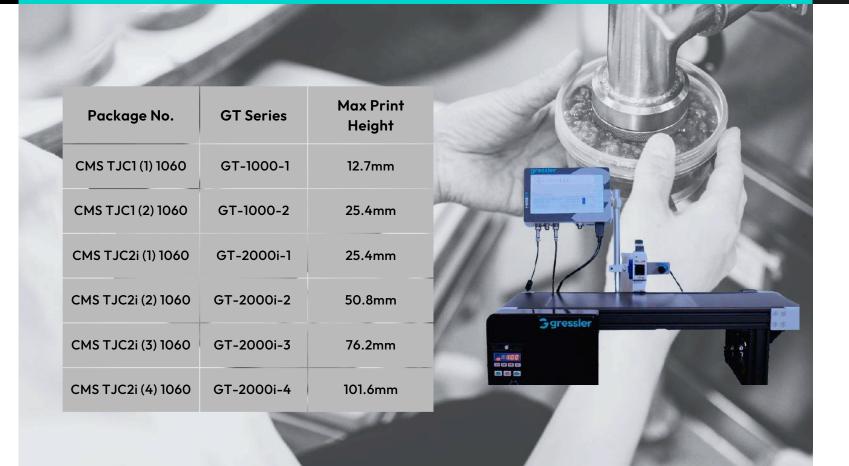

MINI FRICTION FEEDER **GAF-8030 & TIJ GT SERIES**

- Variable frequency speed control with adjustable range from 5 to 100 meters per minute
- Product size range: 50-300mm, fully adjustable
- Adjustable pressure plate for handling various packaging thicknesses
- Bracket designed for easy installation of inkjet printers

Supported Packaging Types

Carton boxes, paper boxes, plastic packaging bags, cards, and

Material: Stainless Steel 201#

Dimensions: 690mm (L) x 370mm (W) x 390mm (H) Belts Thickness: 2mm, Adjustable Width: 300mm Black finish

